


Karl-Johan Table Lamp



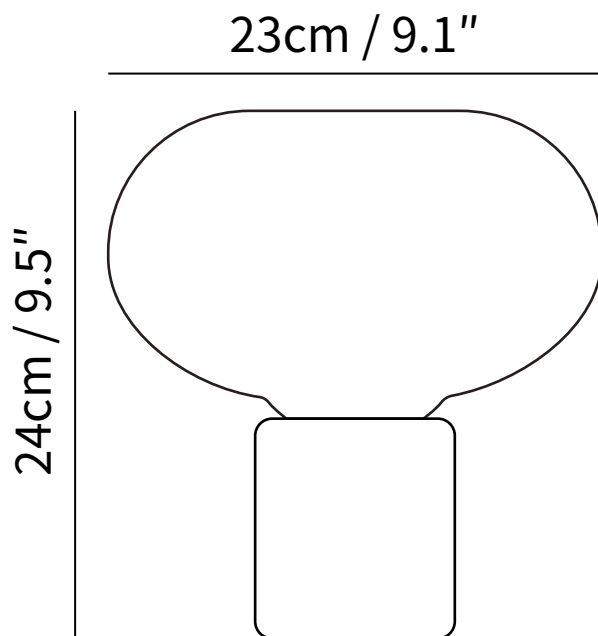

Inspiration

The Karl-Johan Table Lamp is inspired by excursions into nature. A search for wild mushrooms. The tones of an autumn forest. This soothing lamp combines the soft curves of glass with the stability of black marquina or smoked oak. The result is a poetic piece, a combination of tone and texture, dark and light.

Finish Palette

Finishes: Black

Lampshade: Glass

Glass Colours: Smoke, Amber

Customization available upon request.

Made and assembled in China.

Specifications

DIMENSIONS

9.1" D x 9.5" H / 23cm D x 24cm H

Light Source: E26 or E27(included)

Power: 40 Watt 3000K

CRI: 80+

Lumens: 4400 Lumens est.

LED Drivers: No, (No need to connect the driver)

Dimming: Not supported Dimming

Cable type

Provide Cable with Switch Plug Length 59" / 150cm.
(additional lengths are available upon request)

Warranty: 3 years

Environment: Indoor

Weight: 6.6 lbs/ 3 kg

Standard Lead time: 4-7 weeks

MATERIALS


Marble, Glass

Voltage: AC 120-240V

Certification: CCC, CE, UL, SAA, KC



UL, cUL (120V), CE, CB (240V) Certified

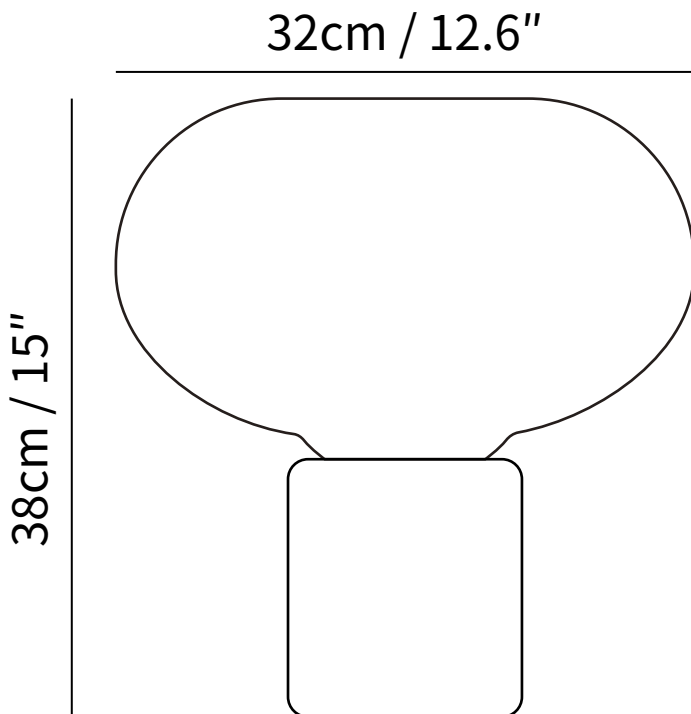

Inspiration

The Karl-Johan Table Lamp is inspired by excursions into nature. A search for wild mushrooms. The tones of an autumn forest. This soothing lamp combines the soft curves of glass with the stability of black marquina or smoked oak. The result is a poetic piece, a combination of tone and texture, dark and light.

Finish Palette

Finishes: Black

Lampshade: Glass

Glass Colours: Smoke, Amber

Customization available upon request.

Made and assembled in China.

Specifications

DIMENSIONS

12.6" D x 15" H / 32cm D x 38cm H

Light Source: E26 or E27(included)

Power: 40 Watt 3000K

CRI: 80+

Lumens: 4400 Lumens est.

LED Drivers: No, (No need to connect the driver)

Dimming: Not supported Dimming

Cable type

Provide Cable with Switch Plug Length 59" / 150cm.
(additional lengths are available upon request)

Warranty: 3 years

Environment: Indoor

Weight: 8.8 lbs/ 4 kg

Standard Lead time: 4-7 weeks

MATERIALS

Marble, Glass

Voltage: AC 120-240V

Certification: CCC, CE, UL, SAA, KC



UL, cUL (120V), CE, CB (240V) Certified